

NMD 2.92mm Test Port Adapters

(DC - 40GHz)

Key Features

- Frequency Range up to 40GHz
- Customized connector types
- Maximum VSWR 1.20:1
- Durability >2000 cycles
- RoHS compliant



Overview

Saluki NMD test port adapters is a ruggedized test port connector used for stable connection to VNA or any NMD style test port. These adapters can provide connection between or adapt to cable assemblies and devices. The rugged construction makes the connection very stable and repeatable.

Electrical Specifications

P/N	SA40FF(N2.92-2.92)
Connector 1	NMD 2.92mm female
Connector 2	2.92mm female
Frequency Range	DC - 40GHz
VSWR (Max.)	1.20:1
Impedance	50Ω

Note: For other port configuration, please send email to sales@salukitec.com

Material Specifications

Body Type	Straight
Housing	SU303, Polished & Passivated
Center Conductor	Beryllium copper, Gold plated
Dielectric Type	PEEK
Temperature Range	-55° C to 165° C

No.367, Fuxing N. Rd.,105 Taipei,Taiwan Tel: +886. 909 602 109


sales@salukitec.com www.salukitec.com



NMD 2.92mm Test Port Adapters

(DC - 40GHz)

Drawings

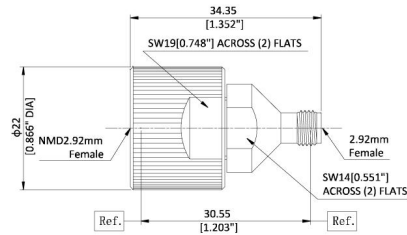

NMD2.92mm (f) to 2.92mm (f)

Model SA40FF(N2.92-2.92)

Frequency DC - 40GHz

VSWR 1.20:1 (max.)

Note: Information will conduct the necessary updates , the contents of this document are subject to change without notice