


Features

- Ultra Wide Band Operation 0.02-18GHz
- TTL compatible driver included
- Fast Switching Speed
- Low Insertion Loss and High Isolation
- Customization available upon request

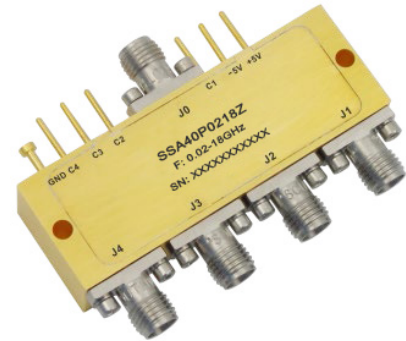

Typical Applications

- Wireless Infrastructure
- 5G communication
- Test and measurement Instrument

RF Microwave & VSAT
Fiber Optics

Parameter	Min.	Typ.	Max.	Min.	Typ.	Max.	Min.	Typ.	Max.	Units
Frequency Range	0.02-6			6-12			12-18			GHz
Insertion Loss		1.8	2.5		3.0	3.5		4.1	4.5	dB
Insertion Loss Temperature Coefficient		0.003			0.003			0.003		dB/ ° C
Isolation	60	75		60	70		60	65		dB
Input VSWR		1.8	2.0		1.6	1.8		1.6	1.8	:1
Output VSWR		1.8	2.0		1.6	1.8		1.6	1.8	:1
RF Input power			30			30			30	dBm
DC Power Dissipation		0.8			0.8			0.8		W
0.1dB Compression Point (P0.1dB)		30			30			30		dBm
IIP3		41			40			39		dBm
Switching Speed	250 Max.									ns
Weight	1.5 Max.									ounces
Impedance	50									Ω
Bias Current (+5V/-5V)	160/50 Max.									mA
Input / Output Connectors	SMA-Female									
Finish	Gold Plated									
Material	Aluminum									
Sealing	Hermetically Sealed (Optional)									

Absolute Maximum Ratings

Biasing	+5V±10%/-5V±10%
---------	-----------------

Note: TTL pins cannot be connected to the negative voltage otherwise the internal driver will be damaged.

Ordering Information


Part No.	Description
SSA40P0218Z	SP4T 0.02-18GHz PIN Diode Switch

Environmental Specifications

Operational Temperature	-40°C to +85°C (Case Temperature)
Storage Temperature	-50°C to +105°C
Altitude	30,000 ft. (Epoxy Sealed Controlled environment)
	60,000 ft. 1.0psi min (Hermetically Sealed Un-controlled environment) (Optional)
Vibration	25g RMS (15 degrees 2KHz) endurance, 1 hour per axis
Humidity	100% RH at 35°C, 95%RH at 40°C
Shock	20G for 11msec half sine wave, 3 axis both directions

Outline Drawing:

All Dimensions in mm (inches)
Housing Tolerances ± 0.1 (0.004)

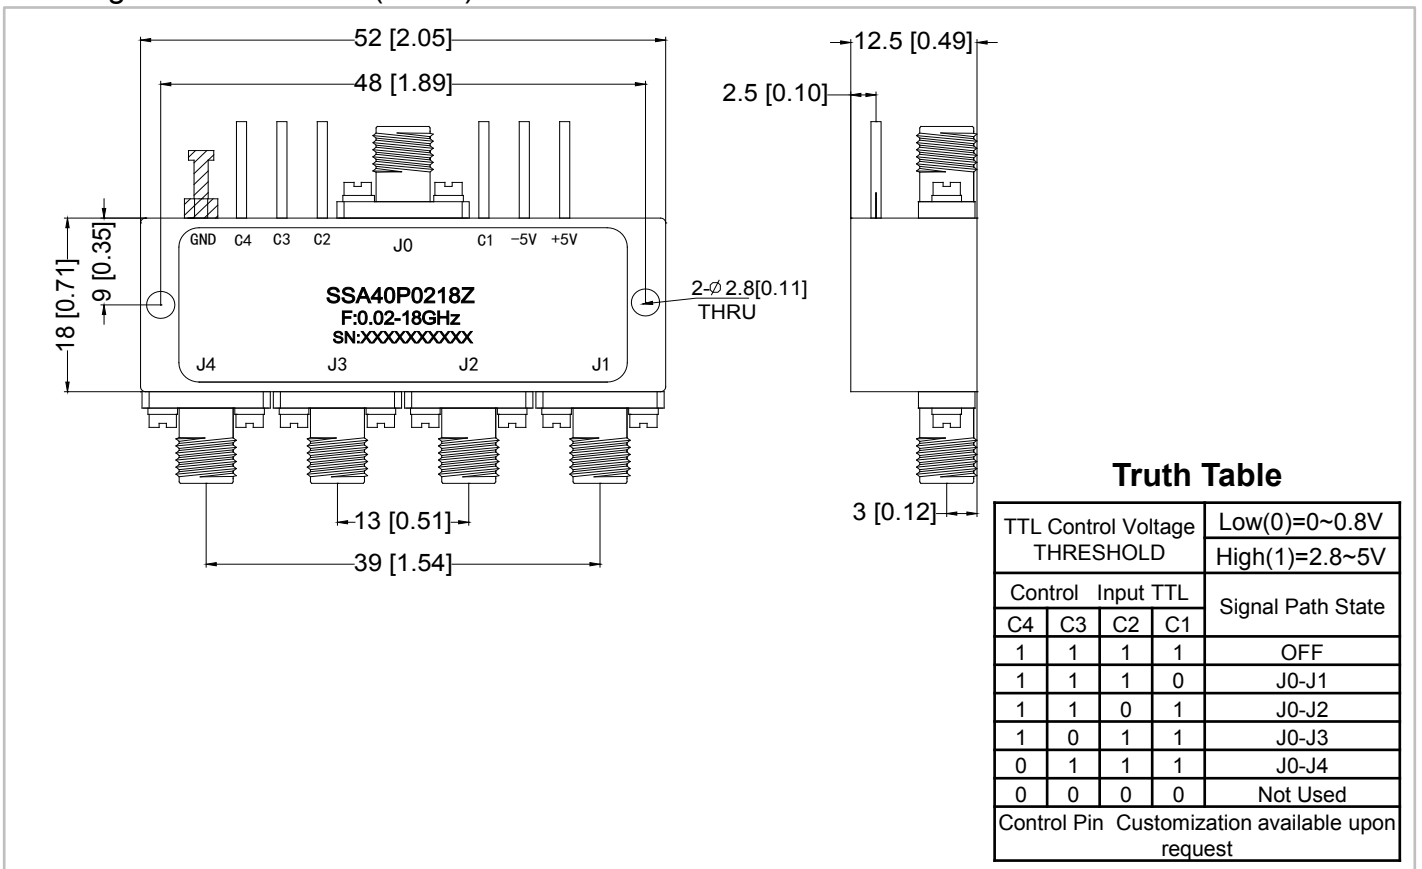


Truth Table


TTL Control Voltage THRESHOLD				Low(0)=0~0.8V
				High(1)=2.8~5V
Control Input TTL				Signal Path State
C4	C3	C2	C1	
1	1	1	1	OFF
1	1	1	0	J0-J1
1	1	0	1	J0-J2
1	0	1	1	J0-J3
0	1	1	1	J0-J4
0	0	0	0	Not Used

Control Pin Customization available upon request


Insertion Loss @+25°C

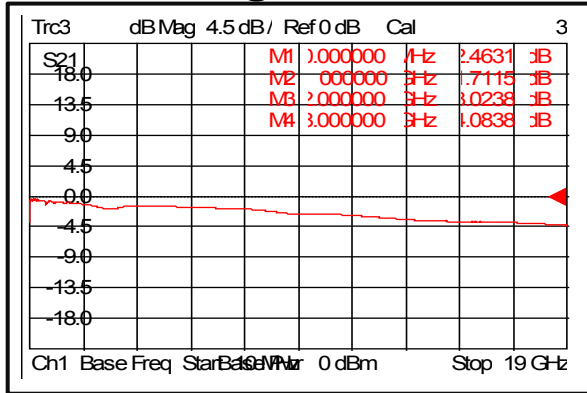


Input VSWR @+25°C

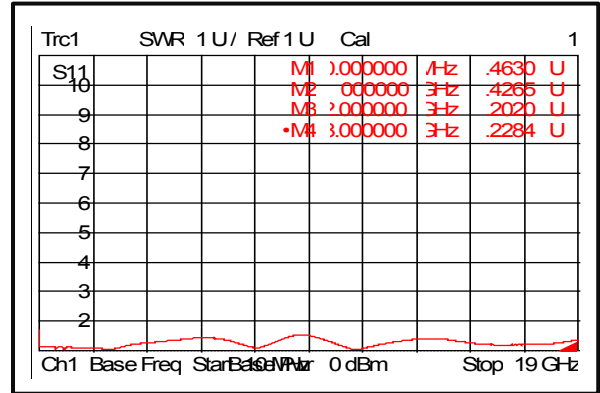


Output VSWR @+25°C

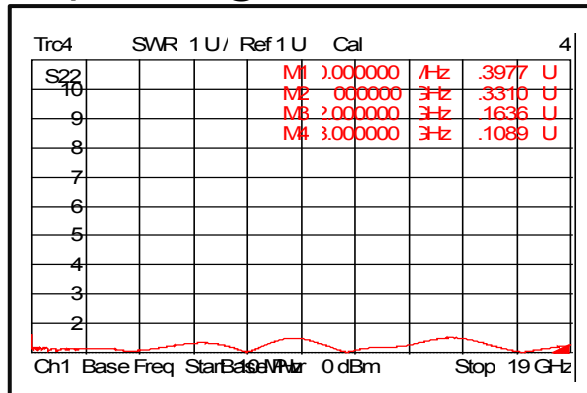


Isolation @+25°C

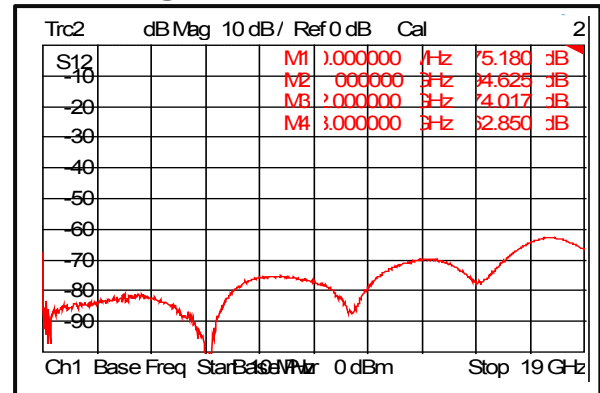


Insertion Loss @-40°C

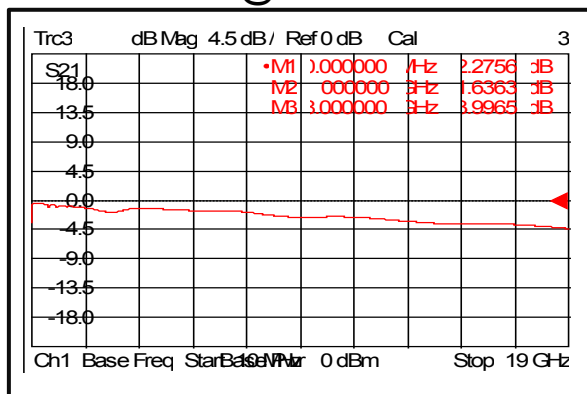


Input VSWR @-40°C

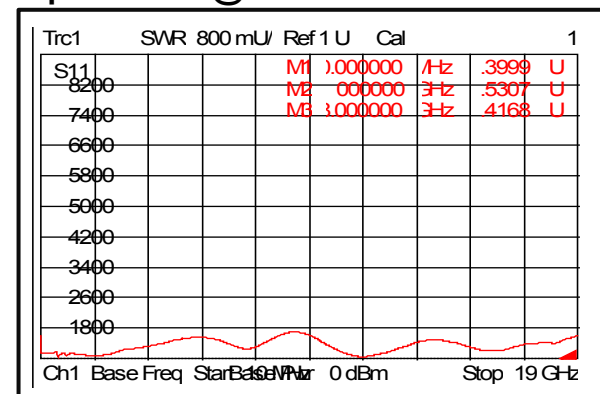


Output VSWR @-40°C

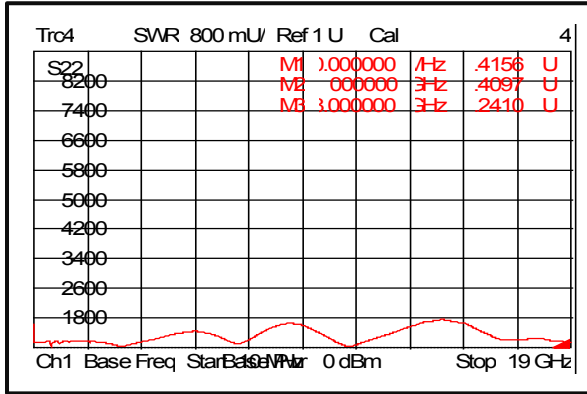


Isolation @-40°C

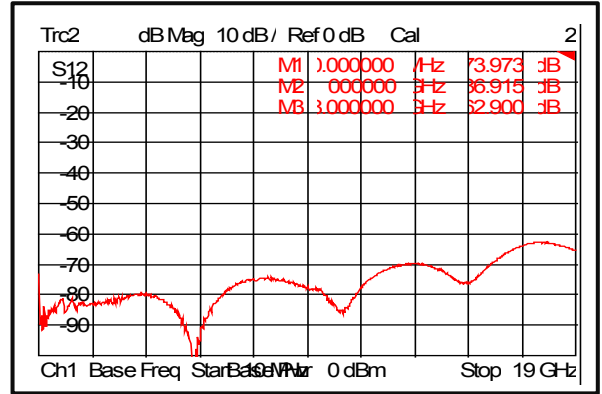


Insertion Loss @+85°C

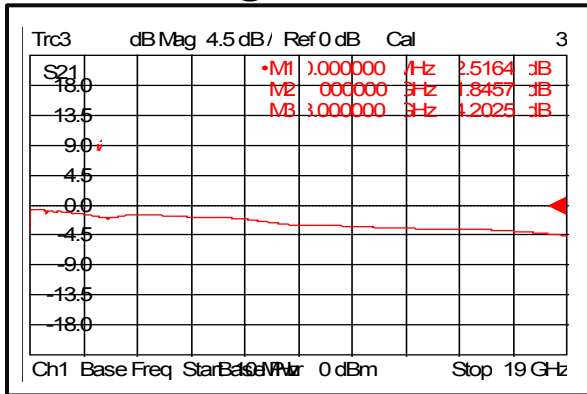


Input VSWR @+85°C

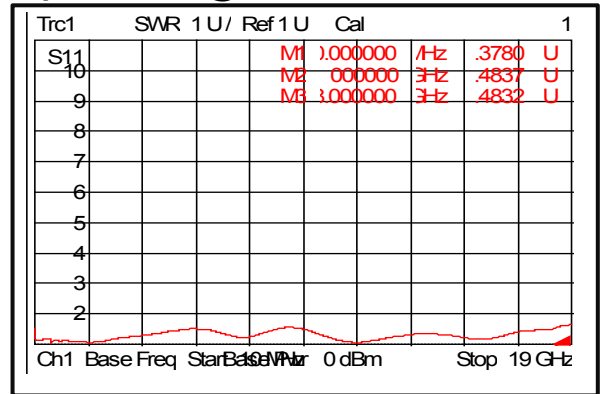


Output VSWR @+85°C

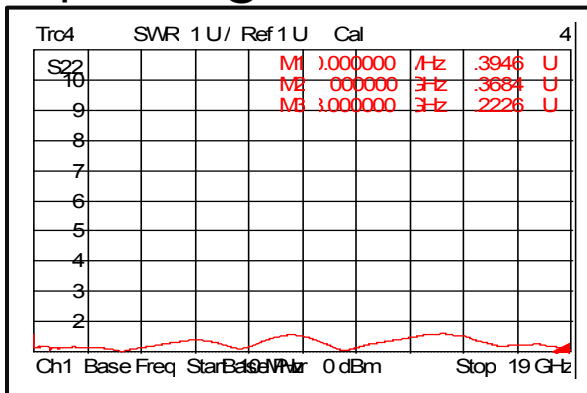


Isolation @+85°C

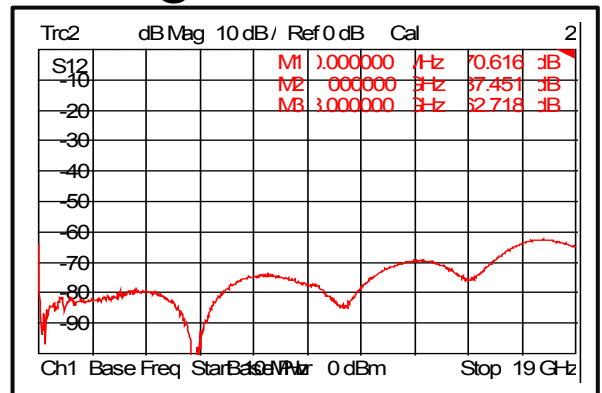


Insertion Loss Temperature Coefficient

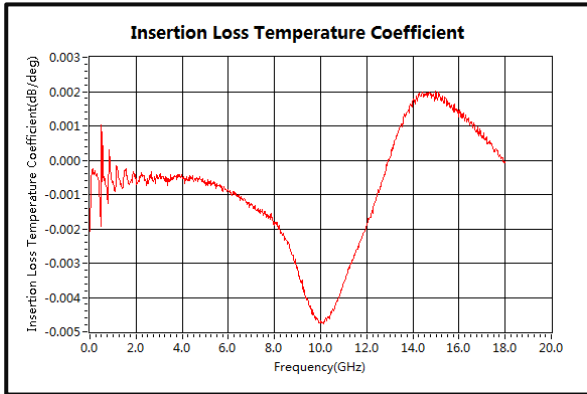


Insertion Loss vs. Temperature

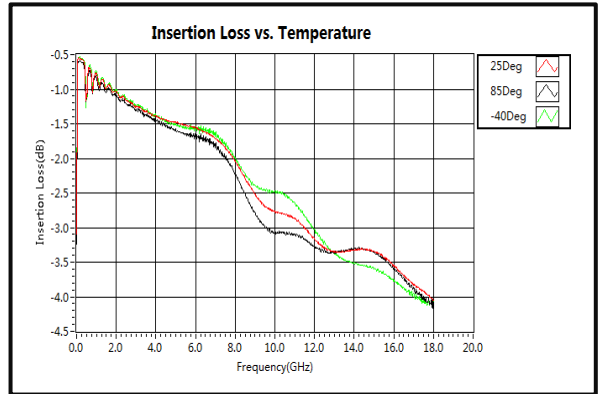

IIP3

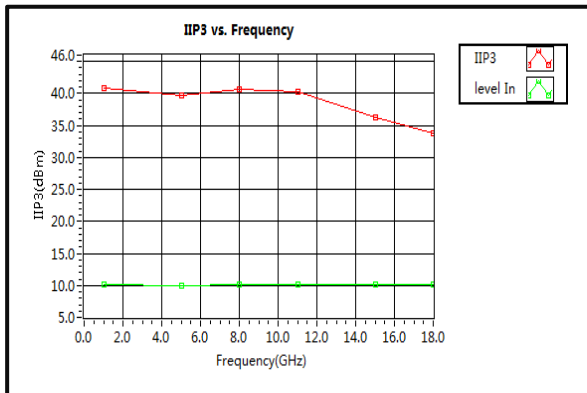

Switching Speed

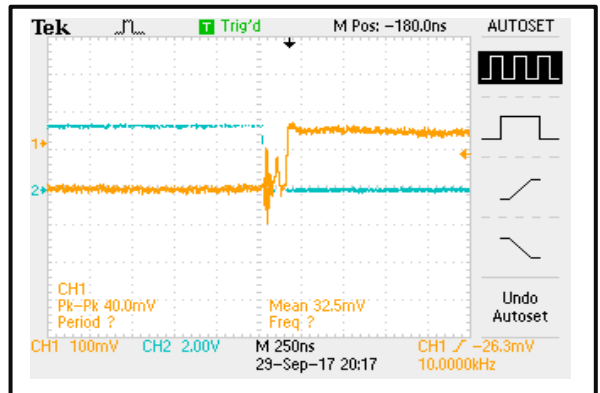

Switching Speed

